

QUICK GUIDE

QUICK GUIDE

Front Bending Series

Model No.	VNL-F16F	VNL-F16F-48V	VNL-F12F	VNL-F10F	VNL-F20C	VNL-F14C	VNL-F10C	VNL-F6C
Voltage (V DC)	24V	48V	24V	24V	24V	24V	24V	24V
Bending Diameter (mm)	120	120	60	60	60	60	60	60
Dimension W*H (mm)	16*17	16*17	12.5*12	10*4.8	20*18	14*14	10*4	6*3
Drawing								
White	✓	✓	✓	✓	✓	✓	✓	✓
CCT	✓	✗	✓	✗	✗	✗	✗	✗
RGB	✓	✓	✗	✗	✓	✗	✗	✗
RGBW	✓	✗	✗	✗	✗	✗	✗	✗
Pixel	✓	✓	✗	✗	✓	✗	✗	✗
PAGE	07-08	09-10	11-12	13-14	15-16	17-18	19-20	21-22

360° Round Neon

Model No.	VNL-R23C	VNL-R19C
Voltage (V DC)	24V	24V
Bending Diameter (mm)	120	120
Dimension W*H (mm)	23	19
Drawing		
White	✓	✓
CCT	✗	✗
RGB	✗	✗
RGBW	✗	✗
Pixel	✗	✗
PAGE	43-44	45-46

Front&Side bending in 1 Neon

Model No.	VNL-FS16C
Voltage (V DC)	24V
Bending Diameter (mm)	60
Dimension W*H (mm)	16.5*15.2
Drawing	
White	✓
CCT	✗
RGB	✗
RGBW	✗
Pixel	✗
PAGE	49-50

Skin Color


Model No.	VNL-SC8C/SC10C/SC12C
Voltage (V DC)	12V
Bending Diameter (mm)	
Dimension W*H (mm)	8*9/10*11/12*13
Drawing	
White	✓
CCT	✗
RGB	✗
RGBW	✗
Pixel	✗
PAGE	51-52

Side Bending-S Series

Model No.	VNL-S10F	VNL-S6F	VNL-S4F	VNL-S10C-D	VNL-S6C	VNL-S5C	VNL-S10C	VNL-S10C-AC
Voltage (V DC)	24V	12V	24V	24V	24V	24V	24V	AC 220V
Bending Diameter (mm)	60	30	50	50	120	30	50	60
Dimension W*H (mm)	10*17	6*12	4*10	10*25	6*15	5*12	10*25	10*25
Drawing								
White	✓	✓	✓	✓	✓	✓	✓	✓
CCT	✓	✓	✗	✓	✓	✗	✗	✗
RGB	✓	✗	✗	✓	✗	✗	✗	✗
RGBW	✗	✗	✗	✓	✗	✗	✗	✗
Pixel	✗	✗	✗	✓	✓	✗	✗	✗
PAGE	23-24	27-28	29-30	31-32	33-34	35-36	37-38	39-40

IP PROCESS

Glue Process (IP67)

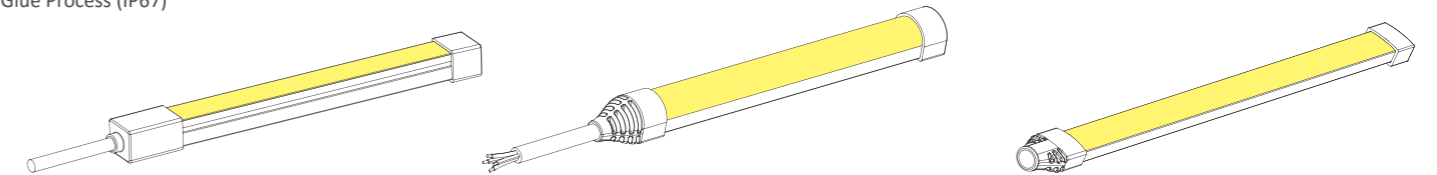

Injection Moulded (IP68&IP67)

